

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
12407Total Pages in this Submission  
3**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**SELECTIVE CALL RADIO APPARATUS WITH IMPROVED DISPLAY FUNCTION**

and invented by:

**Kuniaki Koga**If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 29 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☐ Cross References to Related Applications (if applicable)
  - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
  - d. ☐ Reference to Microfiche Appendix (if applicable)
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings (if drawings filed)
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.

12407

Total Pages in this Submission

3

**Application Elements (Continued)**

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☒ Formal                      Number of Sheets 5
- b. ☐ Informal                      Number of Sheets \_\_\_\_\_
4. ☒ Oath or Declaration
- a. ☒ Newly executed *(original or copy)*                      ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☒ With Power of Attorney                      ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under  
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

**Accompanying Application Parts**

8. ☒ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☒ Information Disclosure Statement/PTO-1449                      ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class                      ☒ Express Mail *(Specify Label No.):* EL014537664US

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
12407

Total Pages in this Submission  
3

**Accompanying Application Parts (Continued)**

15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)


16. ☐ Additional Enclosures (please identify below):

**Fee Calculation and Transmittal**

**CLAIMS AS FILED**

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	18	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	2	- 3 =	0	x \$78.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
OTHER FEE (specify purpose) Assignment Recordation Fee					\$40.00
TOTAL FILING FEE					\$800.00

- ☒ A check in the amount of **\$800.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **19-1013 SSMP** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of \_\_\_\_\_ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).



Signature

Dated: February , 1999

Paul J. Esatto, Jr.  
Reg. No. 30,749  
Scully, Scott, Murphy & Presser  
400 Garden City Plaza  
Garden City, New York 11530  
(516) 742-4343

cc:

SELECTIVE CALL RADIO APPARATUS  
WITH IMPROVED DISPLAY FUNCTION

Background of the Invention

5    1. Field of the Invention

          The present invention relates to a radio selective call apparatus, and more particularly to a selective call radio apparatus having a function of displaying received messages on a display section.

10    2. Description of the Related Art

          In a conventional selective call radio apparatus, received messages are stored in a storage section in the sequence of reception or in the predetermined order of priority. Instead, the received messages are classified into categories. The received messages stored in the storage section are read out and displayed on a display section upon a switching operation performed by a user of the selective call radio apparatus. Such a selective call radio apparatus is disclosed in Japanese Laid Open Patent Application (JP-A-Heisei 3-175827) and Japanese Examined Patent Application (JP-B-Heisei 6-50838).

25           Dozens of messages such as news and weather forecasts are sent per day in data receiving service to the selective call radio apparatus

6640220 0674260

More specifically, as shown in Fig. 1, in  
15 the conventional method, the messages are read  
out in the order of the message #1 (201) → the  
message #2 (202) → the message #3 (#203) → ...→ the  
message #m (204). If the latest message is  
received during the reading of the message #m  
20 (204), the latest message (205) is displayed  
firstly. The next message to be displayed after  
the user finishes viewing the latest message is  
the message #1 (206). Since the latest message is  
received, the message #1 is secondary in  
25 recentness to the latest message. If the user  
continues the message reading, the message #2  
(207) and the message #3 (203) are displayed in

More specifically, as shown in Fig. 1, in  
15 the conventional method, the messages are read  
out in the order of the message #1 (201) → the  
message #2 (202) → the message #3 (#203) → ...→ the  
message #m (204). If the latest message is  
received during the reading of the message #m  
20 (204), the latest message (205) is displayed  
firstly. The next message to be displayed after  
the user finishes viewing the latest message is  
the message #1 (206). Since the latest message is  
received, the message #1 is secondary in  
25 recentness to the latest message. If the user  
continues the message reading, the message #2  
(207) and the message #3 (203) are displayed in

the described order.

In this way, the conventional selective call radio apparatus described above operates in such a manner that when it receives the latest  
5 message during the readout of the stored messages, it displays the received latest message on the display section. In this case, however, the latest message is suddenly displayed while the user is viewing the messages. Such a display  
10 operation is confusing for the user. This causes a problem in that the user cannot distinguish the latest message from other messages. That is, there is the possibility of the user mistaking the latest message for a message received in the  
15 past.

Also, when the user reads out the next message after the user has viewed the latest message, the message #1 is displayed again, regardless of whether the user had viewed the  
20 messages until then.

### **Summary of the Invention**

The present invention is accomplished to solve the above problems. Therefore, an object of  
25 the present invention is to provide a selective call radio apparatus with an improved message display function, in which the user can

understand that a displayed message is the latest one, when the latest message is received and displayed during display of other message.

Another object of the present invention is  
5 to provide a selective call radio apparatus with an improved message display function, in which messages can be effectively displayed.

In order to achieve an aspect of the present invention, a method of displaying  
10 messages in a selective call radio apparatus includes the steps of:

displaying messages, which are already received, on a display unit in a first display attribute in a message display mode in response  
15 to a display instruction;

when a new message is received during the display of the messages, temporarily stopping the display of the messages on the display unit in the message display mode; and

20 displaying the new message on the display unit in a second display attribute different from the first display attribute.

The second display attribute may be a color inversion or a highlighted display.

25 Also, the messages may be displayed on the display unit in an order in the first display attribute in the message display mode. In this

case, the display of the new message is stopped  
in response to a display continuation instruction,  
and then remaining ones of the messages are  
displayed in the order in the first display  
5 attribute in the message display mode, after the  
stop of the display of the new message.

In the above, the order may be an order of  
reception of the messages. In this case, each of  
the messages is received and stored the received  
10 in a memory in the order of reception of the  
messages. Thus, the messages are sequentially  
read out from the memory in the order of  
reception of the messages.

Also, each of the messages may be received  
15 and stored in a memory together with a reception  
time. Thus, the messages are sequentially read  
out from the memory based on the reception times  
of the messages. In this case, the messages may  
be sequentially read out from the memory based on  
20 the reception times of the messages and a  
reference time. The reference time may be  
designated. In this case, the reference time and  
the reception time of each of the messages are  
compared with each other and ones of the messages  
25 previous to the reference time may be  
sequentially read out from the memory.

In order to achieve another aspect of the



present invention, a selective call radio apparatus includes a display unit, a storage unit for storing messages, an operation unit used to input instructions and data, a message receiving unit, and a control unit. The control unit reads out the messages from the storage unit to display on the display unit in a first display attribute in a message display mode in response to a display instruction supplied from the operation unit. The control unit displays a new messages on the display unit in a second display attribute different from the first display attribute when the new message is received by the message receiving unit during the display of the messages.

15       The control unit displays the messages on the display unit in an order of reception of the messages in the first display attribute in the message display mode. Also, the control unit displays remaining ones of the messages in the order of reception in the first display attribute, in response to a display continuation instruction supplied from the operation unit. In this case, the control unit sequentially stores the messages received by the message receiving unit in the storage unit in the order of reception of the messages. The control unit includes a read pointer and a write pointer, and stores the

message received by the message receiving unit in the storage unit using the write pointer and sequentially reads the messages from the storage unit using read pointer.

5           Also, the control unit may include a timer and a reference time register for holding a reference time. In this case, the control unit stores the message received by the message receiving unit in the storage unit together with  
10 a reception time from the timer, and sequentially reads out the messages from the storage unit based on the reception times of the messages and the reference time. The control unit sets the reference time in the reference time register  
15 when the reference time is supplied from the operation unit. The control unit sequentially reads ones of the messages previous to the reference time from the storage unit.

## 20           **Brief Description of the Drawings**

Fig. 1 is a diagram to explain a conventional message display function;

Fig. 2 is a block diagram illustrating the structure of a selective call radio apparatus  
25 with a message display function according to an embodiment of the present invention;

Fig. 3 is a diagram to explain the message

09449 0644260

display function according to the embodiment of the present invention; and

Figs. 4 and 5 are flowcharts showing a message display operation according to the embodiment of the present invention.

### Description of the Preferred Embodiments

A selective call radio apparatus of the present invention will be described below in detail with reference to the attached drawings.

Fig. 2 is a block diagram illustrating the structure of the selective call radio apparatus with a message display function such as a pager according to the embodiment of the present invention. Referring to Fig. 1, the selective call radio apparatus according to the embodiment of the present invention is composed of an antenna 1, a radio section 2, a waveform shaping circuit 3, a control section 4, a rewritable ROM (Read-Only Memory) 5, a RAM (Random Access Memory) 6, a display driver 7, a display section 8, amplifier circuits 9 and 11, a speaker 10, an LED (Light-Emitting Diode) 12, a power supply switch 13, a clock generating circuit 14, a power supply 15, a switch 16 and a counter 17 as a read pointer. The power supply switch 13 and the switch 16 are contained in an operation section

(not shown) which is used to input instruction and data.

The antenna 1 receives a radio signal. The received radio signal is amplified and  
5 demodulated by the radio section 2. The demodulated signal is converted by the waveform shaping circuit 3 to one having such a waveform as can be read by the control section 4.

The control section 4 includes a write  
10 pointer (not shown) and operates based on a program stored in the ROM 5. The control section 4 compares its own call number, which has been written in advance in the ROM 5, with the signal supplied from the waveform shaping circuit 3.  
15 When there is a coincidence between them, the control section 4 controls the amplifier circuit 9 to drive the speaker 10 such that alarm sound is sent out from the speaker 10. Also, the control section 4 controls the amplifier circuit  
20 10 to drive the LED 12 such that the LED 12 is lighted. Thus, a call arrival is informed to the user.

When the received radio signal contains a message, the control section 4 stores the message  
25 in the RAM 6 using the write pointer. Also, when the message is displayed, the control section 4 reads out the message from the RAM 6 using the

read pointer and controls the display driver 7 to drive the display section 8 such that the message is displayed.

In the selective call radio apparatus  
5 according to the embodiment of the present invention, the power supply is turned on in response to the operation of the power supply switch 13. At this time, the selective call radio apparatus operates in accordance with the clock  
10 signal supplied from the clock generating circuit 14, when the power supply 15 is turned on. Message selection is performed using the switch 16, and the counter 17 counts messages read out at the message readout time. The control section  
15 4 reads messages stored in the RAM 6 using the read pointer to display on the display section 8. While the user is reading the messages successively, the counter 17 counts how many messages are read out.

20 When the latest message is received during the reading operation of the messages, the current message display is temporarily stopped or interrupted. Then, the latest message is displayed in such a way that it is  
25 distinguishable from other messages. When the display of the latest message is completed in response to a display continuation instruction

supplied from the operation unit, the message next to the message which has been displayed immediately before the latest message is displayed based on the count of the counter 17 as the read pointer.

Fig. 3 is a diagram illustrating a message display function according to the embodiment of the present invention. A difference between the message display function according to the embodiment of the present invention and the conventional message display function will now be described with reference to Figs. 1, 2 and 3.

When the user reads out the messages, the messages are displayed in the order of their reception times, namely in the order from the latest message up to the oldest message. According to the embodiment of the present invention, the messages are read out in the order of a message #1 (101) → a message #2 (102) → a message #3 (103) → ... → a message #m (104).

If the latest message is received during the reading of the message #m (104), the display of message #m is interrupted and the latest message is displayed. The latest message (105) is displayed in a color inversion so that the latest message can be distinguished from the messages which the user has viewed until then. Thus, the

latest message is displayed in a display attribute different from that of the messages which the user has viewed until then. The latest message may be displayed in a highlighted display or in boldface display or by way of varying the typeface.

When the user attempts to view the next message to input a display continuation instruction from the operation unit, the control returns to the message display state in which the user had viewed last. That is, following the latest message, the message #m (106), a message #m+1 (107), a message #m+2 (108) ... are displayed in the described order.

Figs. 4 and 5 are flowcharts showing a message display operation of the selective call radio apparatus according to the embodiment of the present invention. The message display operation according to the embodiment of the present invention will now be described with reference to Figs. 2 to 5.

According to the selective call radio apparatus, a message wait screen is initially displayed (a step S1 shown in Fig. 4). When attempting to read the messages stored in the RAM 6, the user inputs a message display instruction from the operation unit. At this time, the screen

is switched from the message wait screen to a message display screen (step S2 shown in Fig. 4). Then, the message #1 having the most recent reception time among the messages received up to the present time is displayed (step S3 shown in Fig. 4).

After the above message #1 is displayed, it is determined whether the user wants to read the next message, based on a next message display instruction. The next message display instruction is inputted as the operation of the switch 16 of the operation unit. When the user performs no operation (No at a step S4 shown in Fig. 4), a step S5 is executed. At the step S5, it is determined whether a manual reset instruction as a message wait instruction is inputted through an operation of a reset switch (not shown) of the operation unit. If the manual reset instruction is not inputted (No at the step S5), the control returns to the step S4. If the manual reset instruction is inputted (Yes at the step S5), the control returns to the step S1. Also, when a predetermined time elapses without any operation of the operation unit after the message #1 has been displayed, an automatic reset instruction is issued as the message wait instruction (Yes at the step S5). As a result, the control returns to



the step S1.

On the other hand, when wanting to read the next message, the user performs the switching operation of the switch 16 while the message #1 is displayed (Yes at the step S4), so that the counter 17 is incremented by "1". Then, message #2 having reception time recent next to the message #1 is read from the RAM 6, and displayed on the display section 8 through the display driver 7 (a step S6 shown in Fig. 3).

After the message #2 is displayed, it is determined whether the user wants to read the next message. When the user performs no operation (No at the step S7 shown in Fig. 4), a step S8 is executed, as in the above step S4. At the step S8, it is determined whether a manual reset instruction as the message wait instruction is inputted from the operation unit. If the manual reset instruction is not inputted (No at the step S8), the control returns to the step S7. If the manual reset instruction is inputted (Yes at the step S8), the control returns to the step S1. Also, when a predetermined time elapses without any operation of the operation unit after the message #2 has been displayed, the automatic reset instruction is issued as the message wait instruction (Yes at the step S8), as in the step

S5. As a result, the control returns to the step S1.

On the other hand, when wanting to read the next message, the user performs the switching operation of the switch 16 while the message #2 is displayed (Yes at the step S7), the counter 17 is incremented by "1". Then, message #3 having reception time recent next to the message #2 is read from the RAM 6, and displayed on the display section 8 through the display driver 7.

It is supposed that the latest message is received while a message #m is displayed at a step S9 through the above-mentioned operations. If the latest message is not received (No at a step S10 shown in Fig. 5), the control advances to a step S11. In case where the latest message has been received, the control advances to a step S13 to display the latest message on the display section 8. The latest message is displayed in a display attribute different from those of the messages #1 to #m to be distinguishable from other messages (the step S13 shown in Fig. 5).

After the latest message is displayed, it is determined whether the user wants to read the next message. When the user performs no operation (No at a step S14 shown in Fig. 5), a step S15 is executed, as in the above step S4. At the step

S15, it is determined whether the manual reset instruction as the message wait instruction is inputted from the operation unit. If the manual reset instruction is not inputted (No at the step 5 S15), the control returns to the step S14. If the manual reset instruction is inputted (Yes at the step S15), the control advances to the step S1. Also, when the predetermined time elapses without any operation of the operation unit after the 10 latest message has been displayed, the automatic reset instruction is issued as the message wait instruction (Yes at the step S15), as in the step S5. As a result, the control advances to the step S1.

15           On the other hand, when wanting to read the next message, the user performs the switching operation of the switch 16 while the latest message is displayed (Yes at the step S14), the counter 17 is incremented by "1". In this case, 20 however, since the latest message is stored in the RAM 6, the number of messages stored in the RAM 6 increases by "1". Therefore, a message #m is read out from the RAM 6 again and displayed on the display section 8 through the display driver 25 7 (a step S16 shown in Fig. 5). Thus, the switching operation of the switch 16 functions as a display continuation instruction.

After the message #m is displayed, it is determined whether the user wants to read the next message. When the user performs no operation (No at the step S17 shown in Fig. 5), a step S18 is executed, as in the above step S4. At the step S18, it is determined whether the manual reset instruction as the message wait instruction is inputted from the operation unit. If the manual reset instruction is not inputted (No at the step S18), the control returns to the step S17. If the manual reset instruction is inputted (Yes at the step S18), the control returns to the step S1. Also, when a predetermined time elapses without any operation of the operation unit after the message #m has been displayed, the automatic reset instruction is issued as the message wait instruction (Yes at the step S18), as in the step S5. As a result, the control returns to the step S1.

On the other hand, when wanting to read the next message, the user performs the switching operation of the switch 16 while the message #m is displayed (Yes at the step S17), the counter 17 is incremented by "1". Then, message #(m+1) having reception time recent next to the message #m is read from the RAM 6, and displayed on the display section 8 through the display driver 7.

In this way, if the user wants to continue the message display, the same operations as those described above are repeated such that the message #m+1, the message #m+2, ... are displayed on the display section 8 in the order of recentness of their reception times.

AS described above, in the case where no latest message is received during the message display (the step S10 shown in Fig. 5), the control advances to the step S11. In this case, after the message #m is displayed, it is determined whether the user wants to read the next message. When the user performs no operation (No at the step S11 shown in Fig. 5), a step S12 is executed, as in the above step S4. At the step S12, it is determined whether the manual reset instruction as the message wait instruction is inputted from the operation unit. If the manual reset instruction is not inputted (No at the step S12), the control returns to the step S10. If the manual reset instruction is inputted (Yes at the step S12), the control returns to the step S1. Also, when the predetermined time elapses without any operation of the operation unit after the message #m has been displayed, the automatic reset instruction is issued as the message wait instruction (Yes at the step S12), as in the step

0924450.020490

S5. As a result, the control returns to the step S1.

On the other hand, when wanting to read the next message, the user performs the switching operation of the switch 16 while the message #m is displayed (Yes at the step S11), the counter 17 is incremented by "1". Then, the control advance to a step S19 to read message #(m+1) having reception time recent next to the message #m from the RAM 6 to display on the display section 8 through the display driver 7.

When the messages from message #1 to the last message #n in this case have been all read in the above-described manner (a step S20 shown in Fig. 5), the message display operation is terminated and the control returns to the initial wait screen at the step S1 (a step S21 shown in Fig. 5). If the remaining messages are present, the same operations as those of the step S9 to S19 are repeated.

Thus, under the condition that the ROM 6 contains n messages stored therein, if the latest message is received at the time the user has read the m messages from message #1 to message #m, the latest message is firstly displayed on the display section 8 as shown in Fig. 3. At this time point, the number of messages stored in the

ROM 6 becomes  $n+1$ . Therefore, when the user attempts to read the next message by operating the switch 16 thereafter, the  $(m+1)$ -th message, which is the message #m which has been read immediately before the latest message, is displayed.

Therefore, even if the latest message is received while the user reads the messages, the latest message is displayed on the display section 8 so as to be distinguishable from other messages, under the control performed by the control section 4. Since the latest message is displayed so that the user can clearly distinguish the latest message from other messages, the user can read the latest message without confusion with the messages received in the past.

Furthermore, when the user desires to read the message next to the latest message, the user can read the message #m which has been read immediately before the latest message. This eliminates the inconveniences of having to repeatedly read the messages which the user has read once.

In the description, the messages stored in the RAM 6 are all displayed on the display section 8. However, when the message display

instruction is inputted, a display number may  
inputted from the operation unit to the counter  
17 at the same time. In this case, the control  
section 4 controls the display driver 7 to drive  
5 the display section 8 such that the message  
having the display number is first displayed and  
then the subsequent messages are displayed.

Also, the control section 4 may have a  
reception time register and timer (both not  
10 shown) instead of the counter 17. In this case,  
when a message is received, the control section 4  
stores the message in the RAM 6 together with a  
reception time. Also, the control section 4 reads  
the messages stored in the RAM 6 in order based  
15 on the reception times of the messages. When the  
message is displayed and read, the reception time  
the displayed message is held and next the  
message having the reception time most closest to  
the held reception time and older than the held  
20 reception time is displayed and read.

In this case, as in the above, a reference  
time may be set in the reception time register.  
The control section 4 controls the display driver  
7 to drive the display section 8 such that the  
25 message having the reception time most closest to  
the reference reception time and older than the  
reference reception time is first displayed and



then the subsequent messages are displayed.

As described above, according to the selective call radio apparatus with the message display function of the present invention, when  
5 the latest message is received during the display of the stored messages, the latest message is displayed so as to be distinguishable from the stored messages. This makes it possible for the user to understand that when the latest message  
10 is received and displayed, the displayed message is the latest one.

054020 " 06T4260

**What is claimed is:**

1. A method of displaying messages in a selective call radio apparatus comprising the steps of:

displaying messages, which are already  
5 received, on a display unit in a first display attribute in a message display mode in response to a display instruction;

when a new message is received during the display of said messages, temporarily stopping  
10 the display of said messages on said display unit in said message display mode; and

displaying said new message on said display unit in a second display attribute different from said first display attribute.

2. A method according to claim 1, wherein said second display attribute is a color inversion.

3. A method according to claim 1, wherein said second display attribute is a highlighted display.

4. A method according to claim 1, wherein said step of displaying messages includes displaying said messages on said display unit in an order in said first display attribute in said message  
5 display mode, and

654020" 0674260

wherein said method further comprises the  
step of:

stopping the display of said new message in  
response to a display continuation instruction;

10 and

displaying remaining ones of said messages  
in the order in said first display attribute in  
said message display mode, after the stop of the  
display of said new message.

5. A method according to claim 4, wherein the  
order is an order of reception of said messages.

6. A method according to claim 5, further  
comprising the step of:

receiving each of said messages;

sequentially storing the received messages  
5 in a memory in the order of reception of said  
messages, and

wherein said step of displaying messages  
includes sequentially reading out said messages  
from said memory in the order of reception of  
10 said messages.

7. A method according to claim 4, further  
comprising the step of:

receiving each of said messages;

09449 067460

storing the received message in a memory  
5 together with a reception time, and

wherein said step of displaying messages  
includes sequentially reading out said messages  
from said memory based on the reception times of  
said messages.

8. A method according to claim 7, wherein said  
step of displaying messages includes sequentially  
reading out said messages from said memory based  
on the reception times of said messages and a  
5 reference time, and

wherein said method further comprises the  
step of:

designating said reference time.

9. A method according to claim 8, wherein said  
reading step includes:

comparing said reference time and the  
reception time of each of said messages;

5 sequentially reading ones of said messages  
previous to said reference time.

10. A selective call radio apparatus  
comprising:

a display unit;

a storage unit for storing messages;

6544469 0674260

5           an operation unit used to input  
instructions and data;  
          a message receiving unit; and  
          a control unit for reading out said  
messages from said storage unit to display on  
10 said display unit in a first display attribute in  
a message display mode in response to a display  
instruction supplied from said operation unit,  
for displaying a new messages on said display  
unit in a second display attribute different from  
15 said first display attribute when said new  
message is received by said message receiving  
unit during the display of said messages.

11.       A selective call radio apparatus according  
to claim 10, wherein said second display  
attribute is a color inversion.

12.       A selective call radio apparatus according  
to claim 10, wherein said second display  
attribute is a highlighted display.

13.       A selective call radio apparatus according  
to claim 10, wherein said control unit displays  
said messages on said display unit in an order of  
reception of said messages in said first display  
5 attribute in said message display mode, and

664220 "0644260

display remaining ones of said messages in the order of reception in said first display attribute, in response to a display continuation instruction supplied from said operation unit.

14. A selective call radio apparatus according to claim 13, wherein said control unit sequentially stores the messages received by said message receiving unit in said storage unit in the order of reception of said messages.

15. A selective call radio apparatus according to claim 14, wherein said control unit includes a read pointer and a write pointer, and stores the message received by said message receiving unit in said storage unit using said write pointer and sequentially reads said messages from said storage unit using read pointer.

16. A selective call radio apparatus according to claim 10, wherein said control unit includes a timer and a reference time register for holding a reference time, and wherein said control unit stores the message received by said message receiving unit in said storage unit together with a reception time from said timer, and sequentially reads out

064420"064420

10 said messages from said storage unit based on the  
reception times of said messages and said  
reference time.

17. A selective call radio apparatus according  
to claim 16, wherein said control unit sets said  
reference time in said reference time register  
when said reference time is supplied from said  
5 operation unit.

18. A selective call radio apparatus according  
to claim 17, wherein said control unit  
sequentially reads ones of said messages previous  
to said reference time from said storage unit.

06449 "06449" 06449

### Abstract of the Disclosure

A selective call radio apparatus includes a display unit, a storage unit for storing messages, an operation unit used to input instructions and data, a message receiving unit, and a control unit. The control unit reads out the messages from the storage unit to display on the display unit in a first display attribute in a message display mode in response to a display instruction supplied from the operation unit. Also, the control unit displays a new messages on the display unit in a second display attribute different from the first display attribute when the new message is received by the message receiving unit during the display of the messages.

654020" 05T4260



FIG. 1

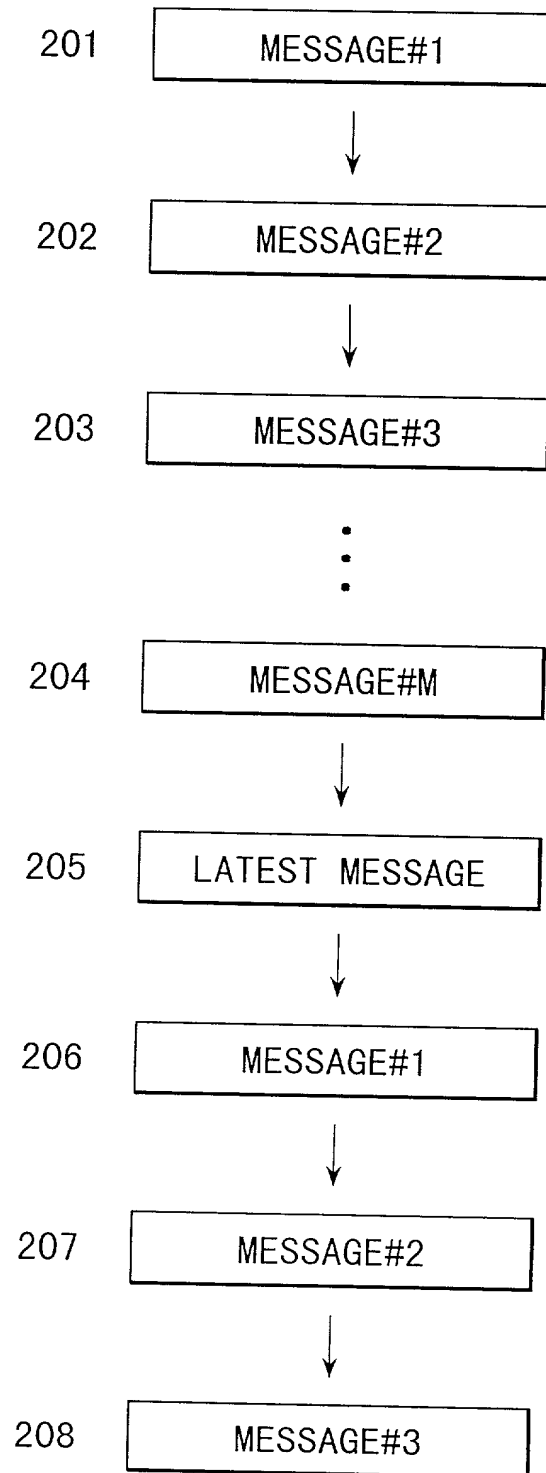


FIG. 2

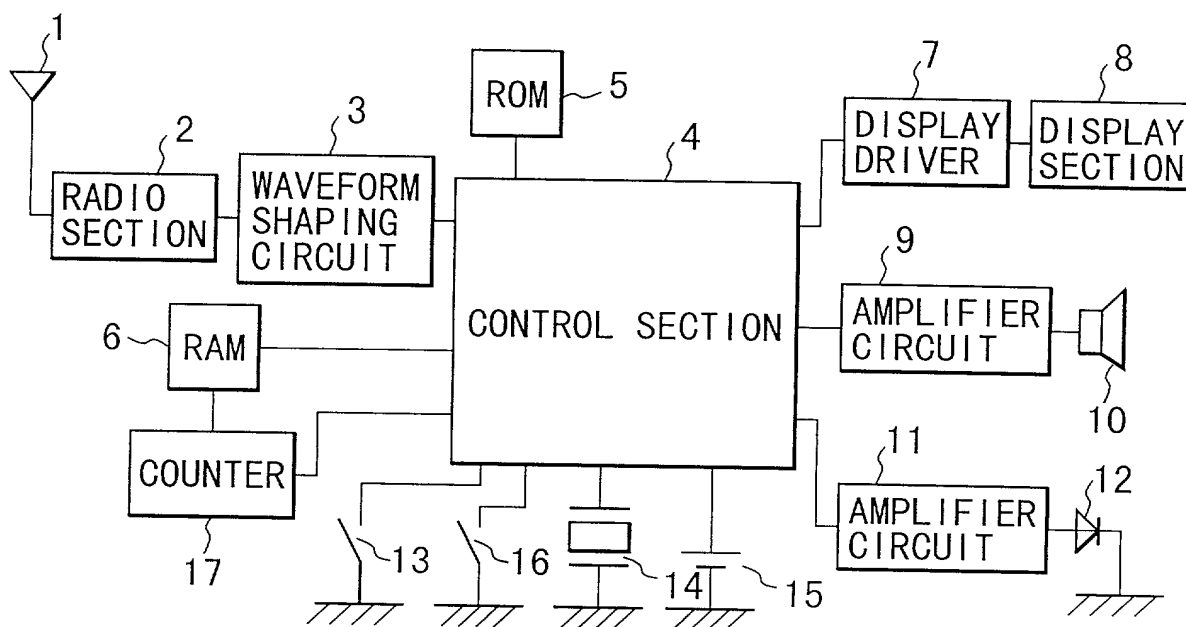


FIG. 3

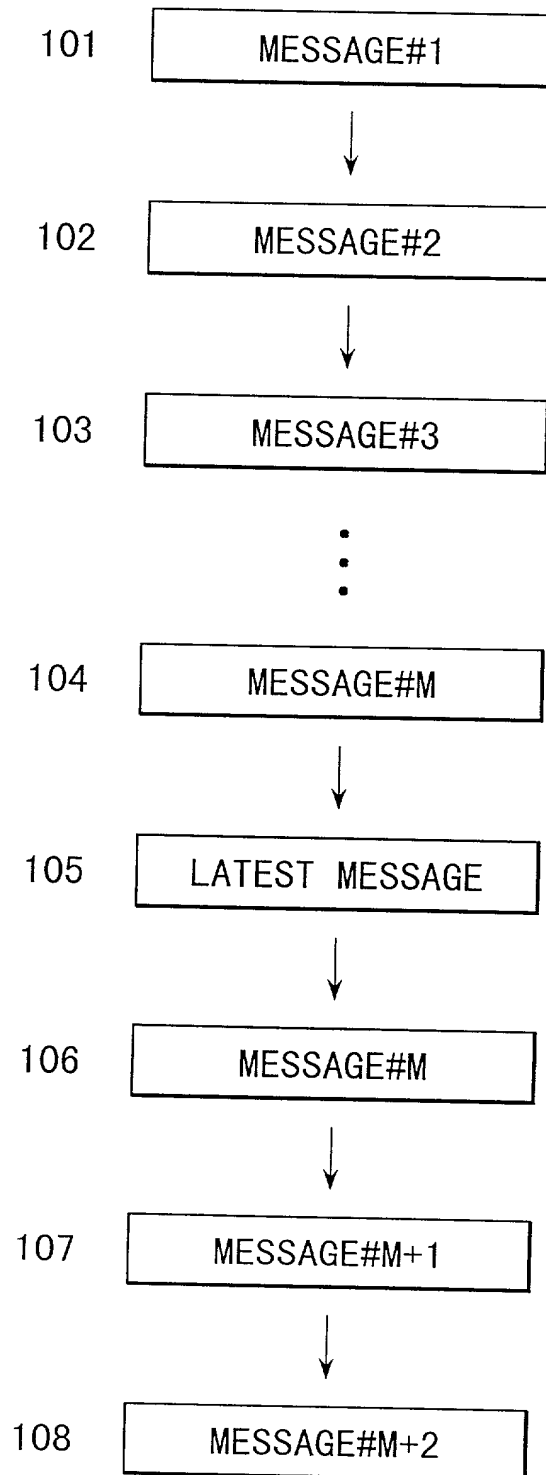


FIG. 4


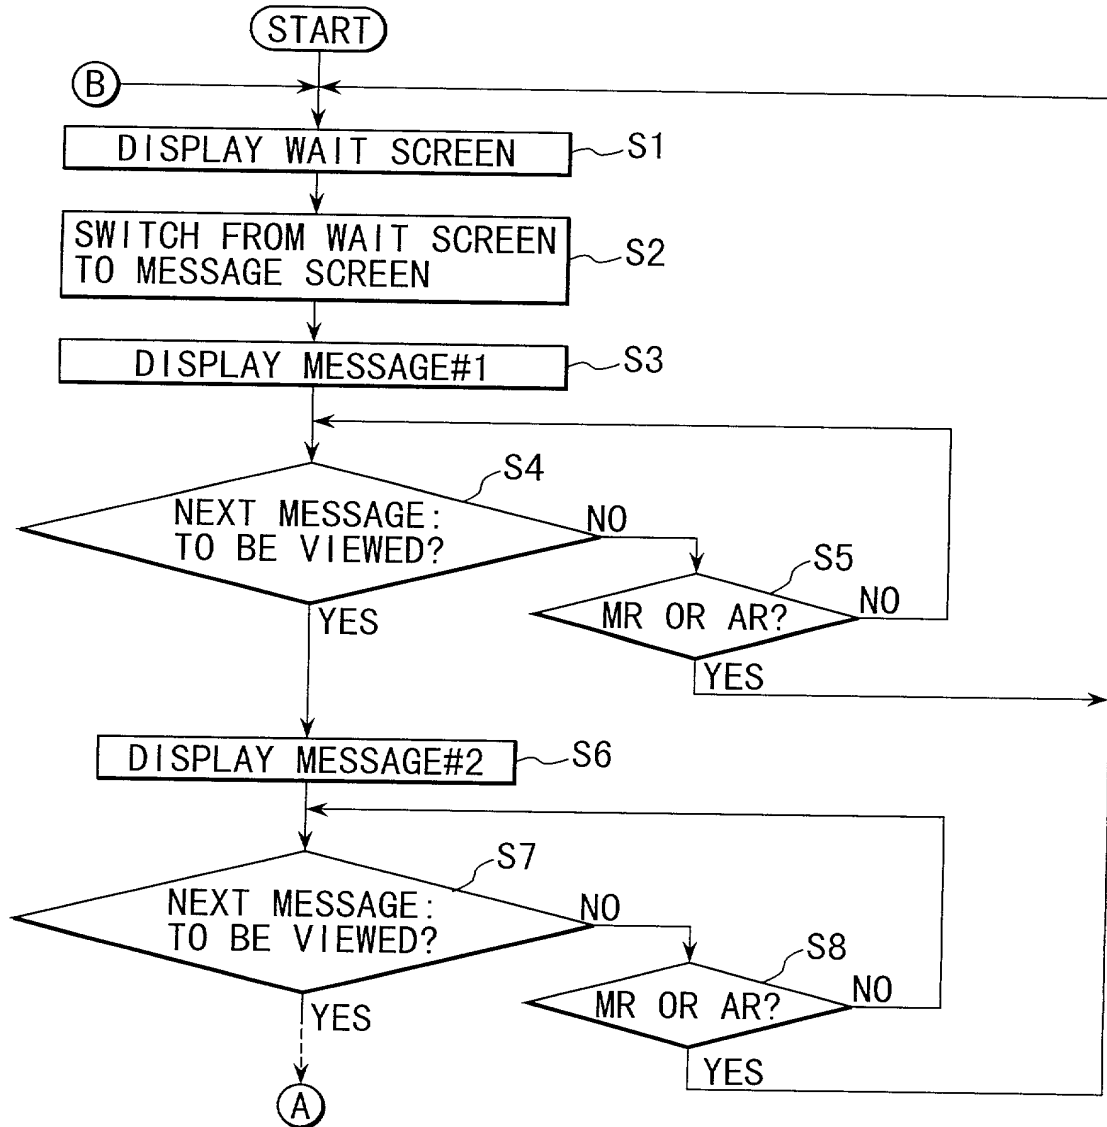


FIG. 5

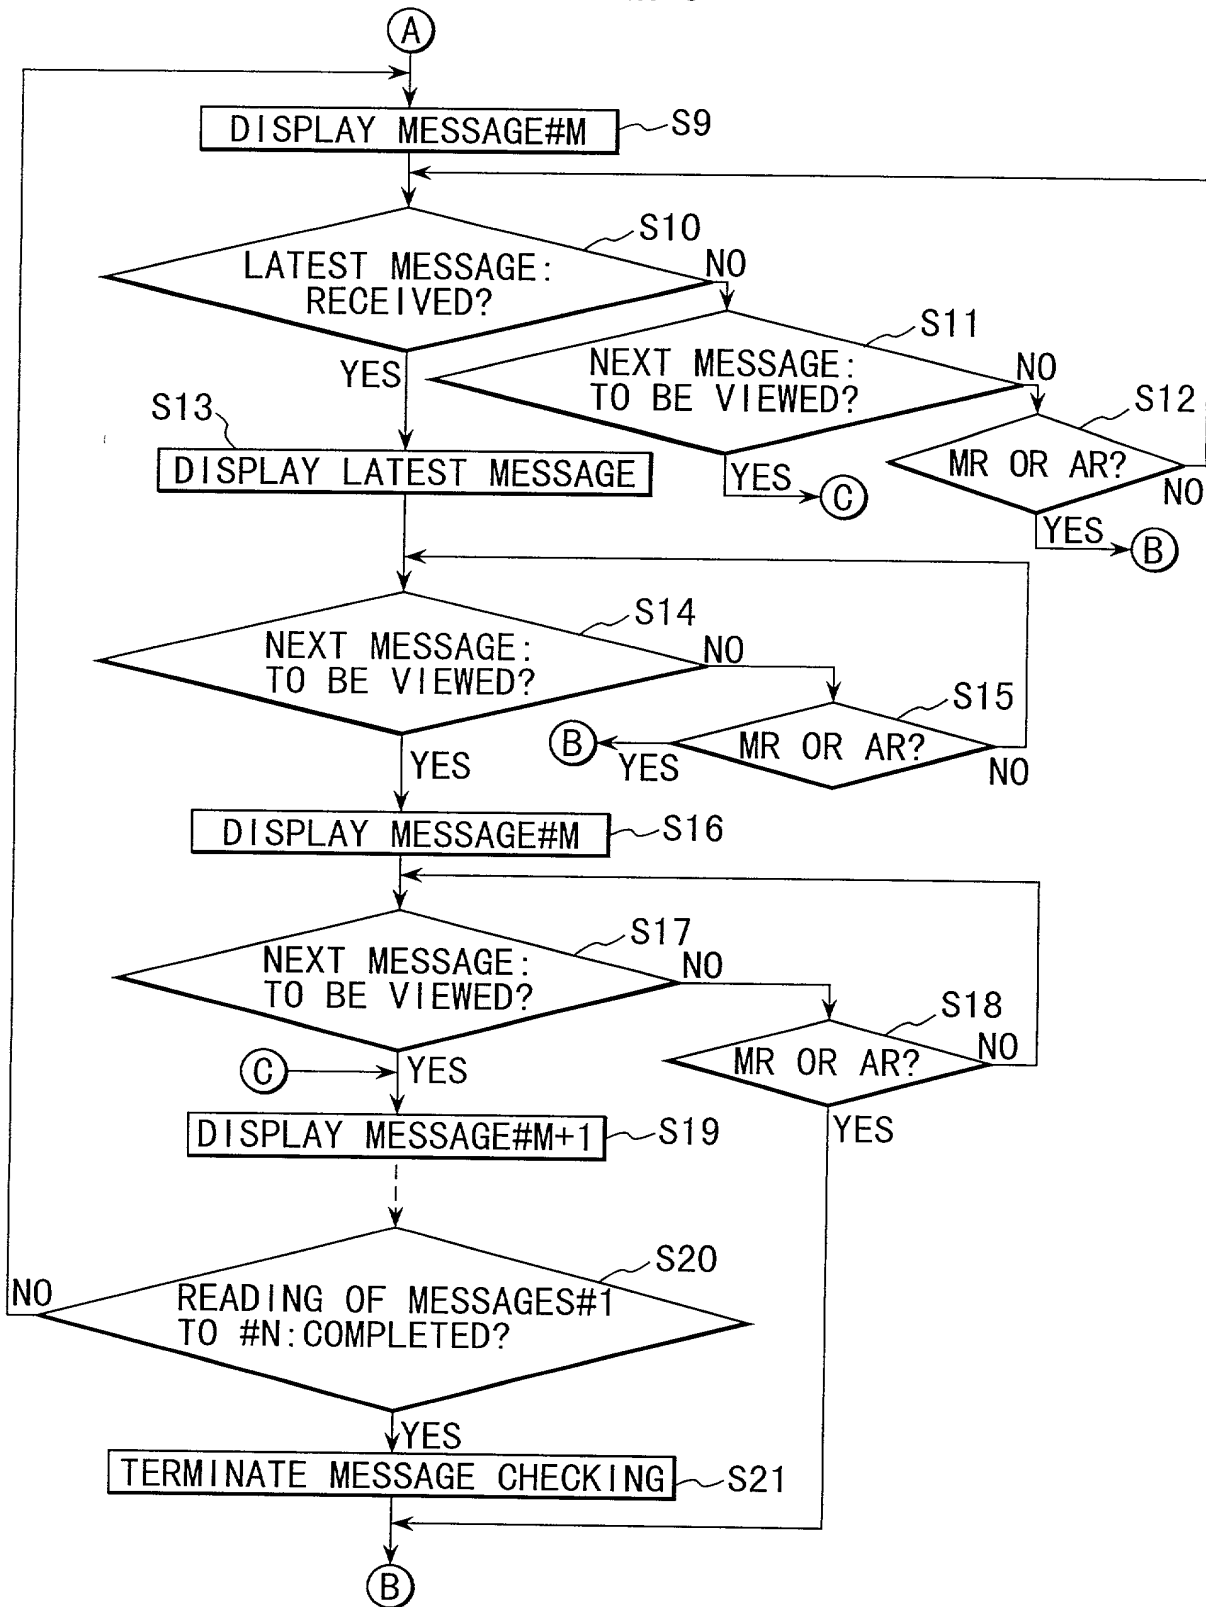

Docket No.

12407

# Declaration and Power of Attorney For Patent Application

## English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

SELECTIVE CALL RADIO APPARATUS WITH IMPROVED DISPLAY FUNCTION

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as United States Application No. or PCT International Application Number \_\_\_\_\_

and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

035301/1998	Japan	18/02/1998
(Number)	(Country)	(Day/Month/Year Filed)
_____	_____	_____
(Number)	(Country)	(Day/Month/Year Filed)
_____	_____	_____
(Number)	(Country)	(Day/Month/Year Filed)

☐☐☐

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

_____ (Application Serial No.)	_____ (Filing Date)
_____ (Application Serial No.)	_____ (Filing Date)
_____ (Application Serial No.)	_____ (Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)
_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)
_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

Stephen D. Murphy, Reg. No.: 22,002

Paul J. Esatto, Reg. No.: 30,749

William C. Roch, Reg. No.: 24,972

Mark J. Cohen, Reg. No.: 32,211

Frank S. DiGiglio, Reg. No.: 31,346

Donald T. Black, Reg. No.: 27,999

Send Correspondence to: Paul J. Esatto, Jr.  
Scully, Scott, Murphy & Presser  
400 Garden City Plaza  
Garden City, New York 11530

Direct Telephone Calls to: *(name and telephone number)*  
Paul J. Esatto, Jr. (516) 742-4343

Full name of sole or first inventor	KUNIAKI KOGA	
Sole or first inventor's signature	<i>Kuniaki Koga</i>	Date Jan. 25, 1999
Residence	Shizuoka, Japan	
Citizenship	Japanese	
Post Office Address	c/o NEC Shizuoka, Ltd., 4-2, Shimomata, Kakegawa-shi, Shizuoka, Japan	

Full name of second inventor, if any	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	